



申恒钢铁
TSSH STEEL

TANGSHAN

SHENHENG STEEL

Professional Steel Exporter

● COMPANY PROFILE

Tangshan Shenheng Steel Group, Since 1992


Tangshan Shenheng Steel Group, consists of Tangshan Fengrun Shenheng Steel Co., Ltd., Tangshan Fengrun Shenheng Trade Co., Ltd, and Hong Kong Fairway International Trading Co., Limited. As a pioneer, Tangshan Fengrun Shenheng Steel Co., Ltd. was founded in 1992, and with more than 800 employee including 20 senior technicians at present.

Tangshan Fengrun Shenheng Trade Co., Ltd is the exporting and importing company of Shenheng Steel Group and mainly exports steel products to Africa, South America, Middle East and Southeast Asia, etc.


Shenheng is a company integrating steel industry and international trade. Shenheng has been exporting steel products since 2000 in Tangshan City and focusing on **Galvanized Steel Coil, Galvalume Steel Coil, Color Coated Steel Coil, Corrugated Steel Roofing Sheet, Cold Rolled Full Hard, etc.** And also we supply our customers with coil cutting and slitting service, tube and pipe with selected factories on price and quality, and selling all over the world.

Year by year, we focused on enhance quality and service for our products, and expecting more guidance from friends and customers. We are steel until future!




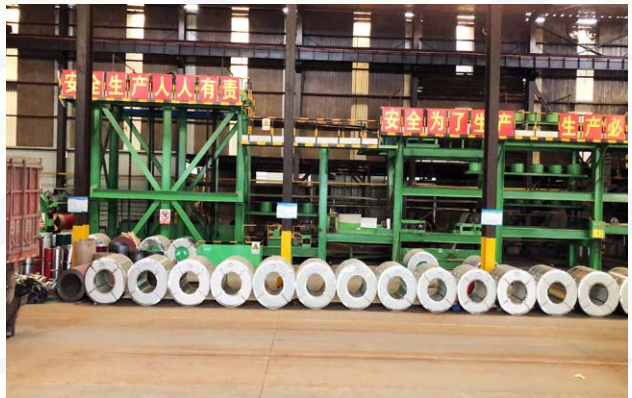

● **PRODUCT RANGE**

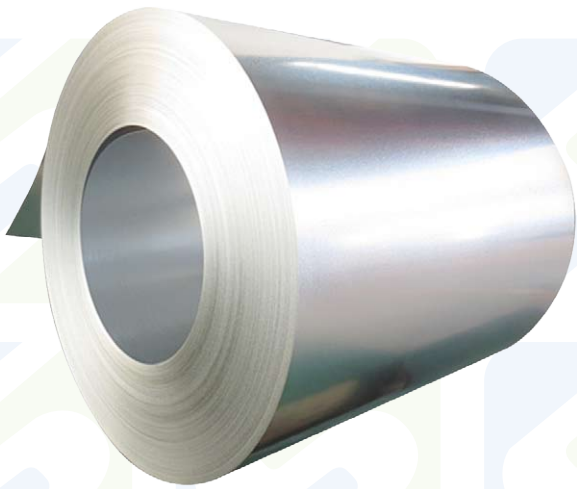


**Hot Dipped Galvanized
Steel Coil (GI / HDGI)**

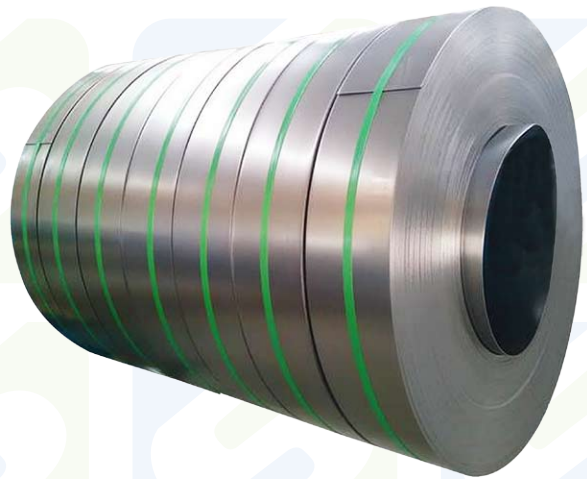


**Galvanized/Galvalume
Steel Strip**




**Pre-painted Galvanized/Galvalume
Steel Coil / Strip**

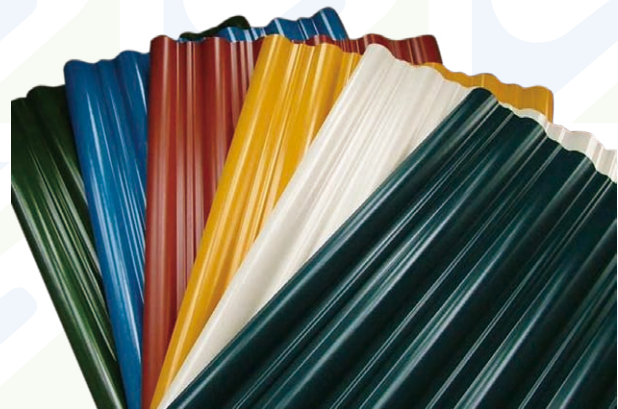

**Pre-painted Corrugated
Roofing Sheet**

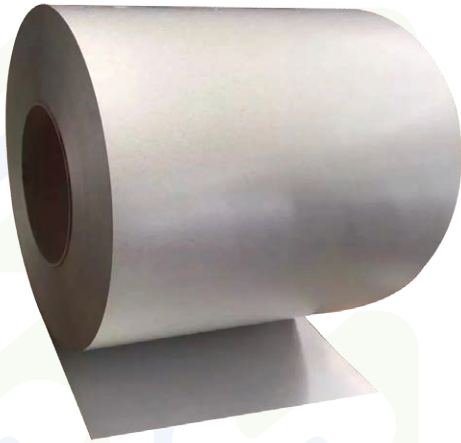

Galvalume Steel Coil / Strip

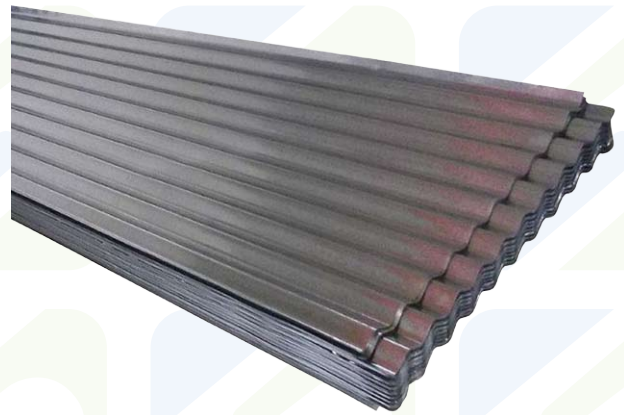

Corrugated Steel Sheet





Galvanized Steel Wire



Tube


● Hot Dipped Galvanized Steel Coil (GI/ HDGI)

Size	(0.13mm-4.0mm)*(600mm-1500mm)*C
Steel Grade	JIS G3302 SGCC, SGCH(FULL HARD-G550), EN 10346-DX51D+Z, DX53D+Z, ASTM A653M CS-B, SS255~SS550
Coil Weight	3MT-10MT or as customer's requirement
Coil ID	508mm/610mm
Chemical Treatment	Chromated (Cr 3+,6+,0+)
Surface	Skin pass/non skin pass
Oil	Slight Oiled/Dry
Spangle	regular spangle, zero spangle, mini spangle, big spangle, etc.
Zinc Coating	Z30-Z275
Application	roofing sheet, building materials, construction materials, home appliance etc.

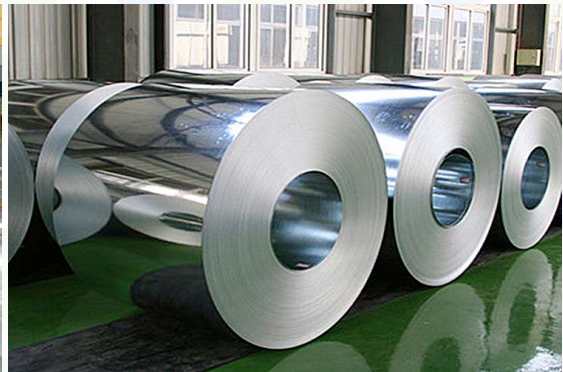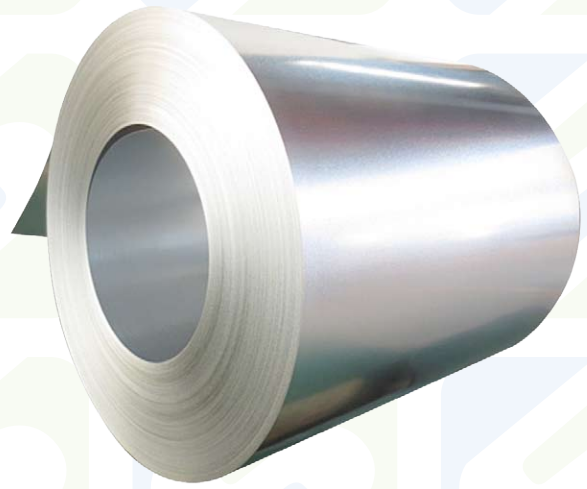


● Galvalume Steel Coil / Strip


COMMODITY	Galvalume Steel Coil/ Strip
STANDARD	JIS, ASTM, GB, ETC
SIZE	Thickness 0.15mm-2.5mm, width 750-1600mm
TEMPER	Full hard, halfhard, soft
STEEL GRADE	DX51D+AZ,SGLCC,SGLCH
COIL WEIGHT	2-10mt
COIL ID	508mm/610mm
SURFACE	Chromated/oiled/dry/AFP/un-oiled
ZINC COATING	AZ30-AZ200
APPLICATION	Roofing base material, building material, construction material and other related applications

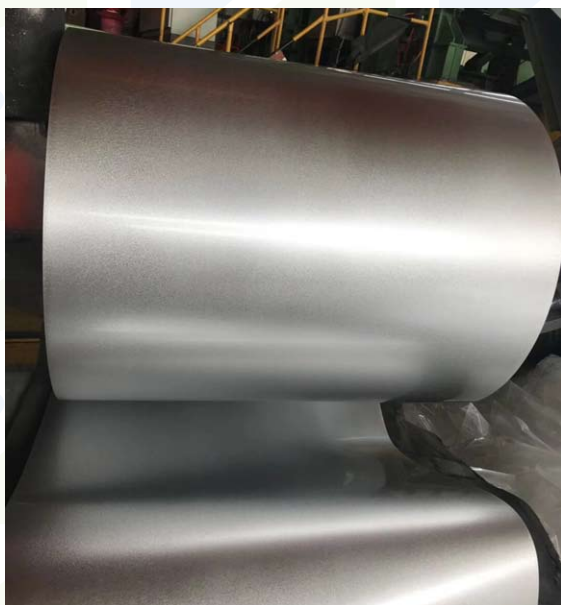

● Galvanized Steel Strip

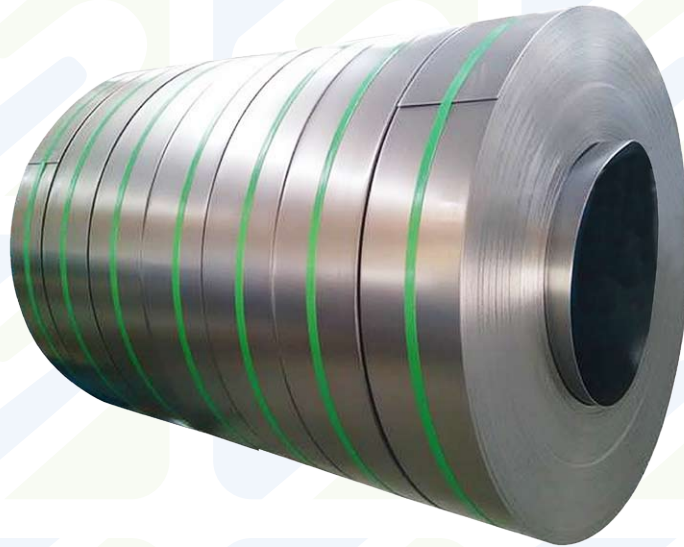

Name	Galvanized steel strip
Standard	JISG3141, DIN1623, ASTM, GB. etc
Grade	SPCC, SPCD, SPCE DC01. DC02. DC03 ST12. ST13. ST14. Etc
Zinc coating	30-275g/m ²
Thickness	0.18-3.0mm
Width	20-600mm.
Coil weight	1-3 tons or as per customer's requirement
Tolerance	width: +/-2mm or as per customer's requirement
Packing	Standard export strong and seaworthy packing

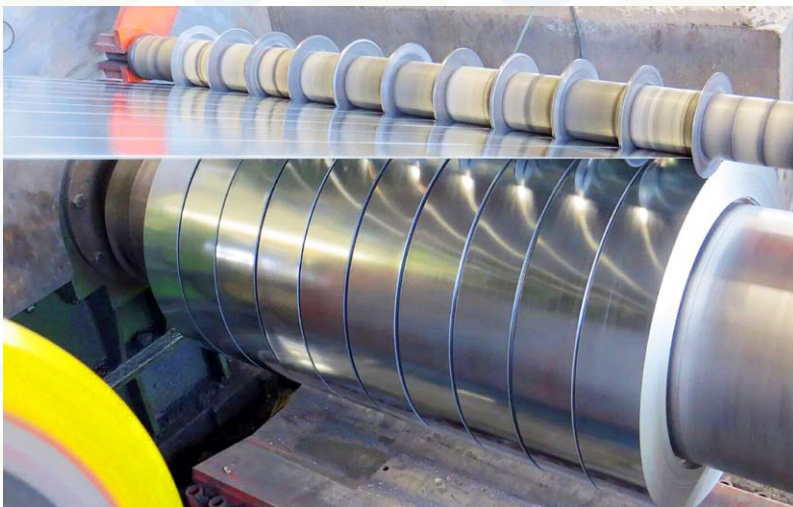

● Pre-painted Galvanized Steel Coil / Strip Pre-painted Galvalume Steel Coil / Strip




Commodity	PPGI/PPGL
Standard	JIS G3302, JIS G3313, ASTM A653, GB/T2518-88, GB11253-89, BS, ect.
Grade	SGCC, CGCC, SGCD, SPCC, DX51D, DX52D, DX53D
Thickness	0.15mm-1.2mm
Width	600-1250mm(coils); 30mm-700mm(strip)
Coil ID	508mm/610mm
Coil Weight	1.5-6tons
Zinc Coating	Z20-Z270g/m ²
Color	sea blue, white grey, bright red or according to RAL color system
Thickness of coating	Top coating:12-25 microns; back coating:5-8microns
Technique	Cold rolled/ galvanized steel coil, galvalume steel coil
Surface Production	PE, PVDF, SMP, HDP, ect.
Application	Roofing, Corrugated Roofing Making, Outside of the buildings, Structure, Wall, Deep Drawn, etc.



● Aluminium Coil / Aluminum Strip


Product Name	Aluminium Coil / Aluminum Strip
Grade	1000, 2000, 3000, 5000, 6000, 7000 series.
Standard	GB/T 3880-2006, Q/Q 141-2004, ASTM, JIS, EN
Thickness	0.01-20mm
Width	6mm-2600mm
Surface Treatment	Coated, Compositd, Embossed, Holographic Impression, Printed, Be free from Oil Stain, Dent, Inclusion, Scratches, Stain, Oxide Discoloration, Breaks, Corrosion, Roll Marks, Dirt Streaks and other defect which will interfere with use.
Alloy Or Not	Alloy or Not
Application	Building, Decoration, construction, insulation, building, roofing, ceiling
Export to	Korea, Singapore, Brazil, Thailand, Italy, India, Malaysia, Kuwait, Canada, Vietnam

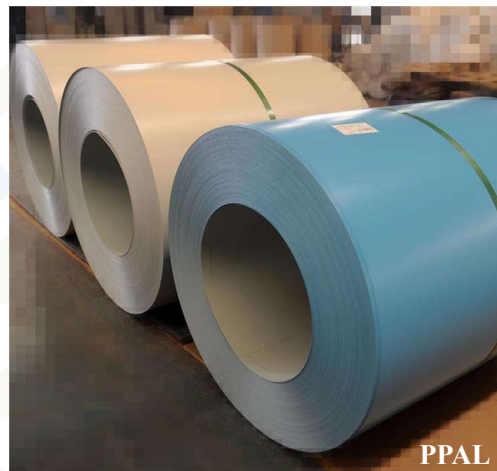


PPAL

● Steel Sheet/ Corrugated Steel Sheet


Grade	SGCC, SGCH, DX51D
Standard	JIS, GB, ASTM
Base Plate	Hot Dipped Galvanized Steel Coil
Zinc Coating	Non-alloyed galvanized(GI)
Zinc thickness	Z30-Z275
Bundle weight	1.5-4 tons or as customer's requirement
Thickness	0.12-4.0mm
Surface processing	Corrugated, Galvanized
Product Feature	water resistance, light weight, easy installation, aesthetic, high tensile
Packing	Standard export strong and seaworthy packing
Application	exterior and interior wall, roofs and soffits, etc.

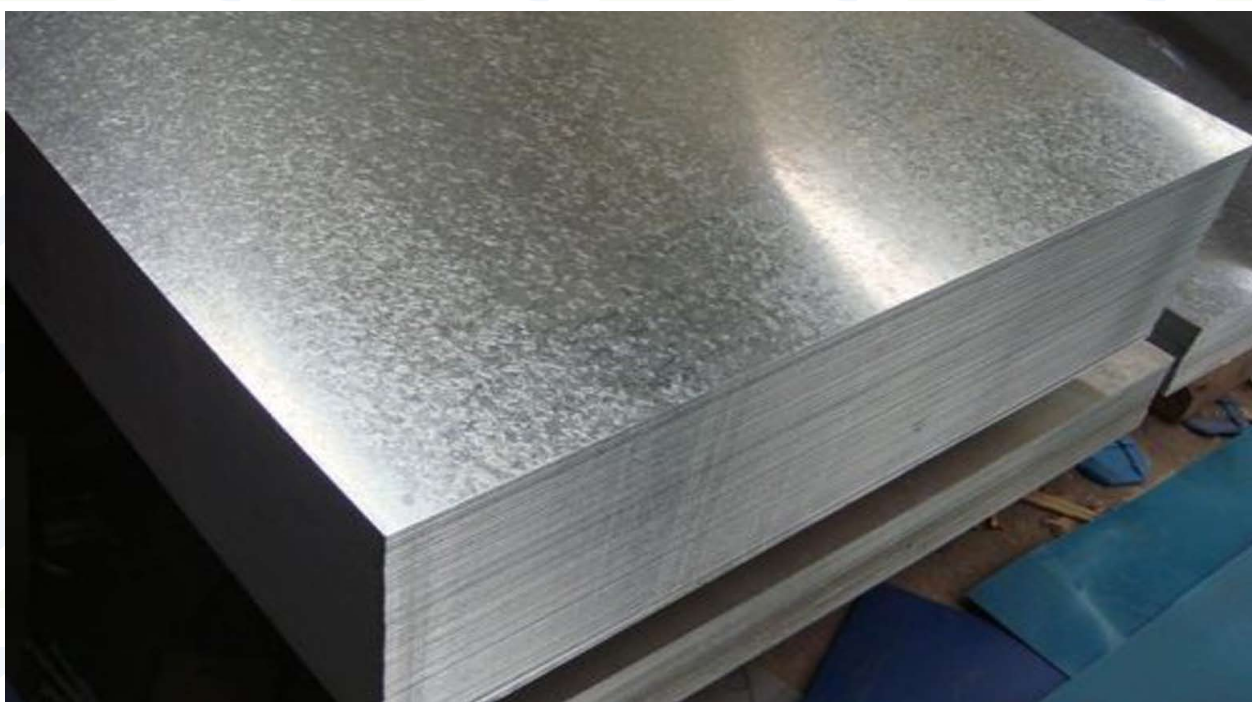

● Pre-painted Corrugated Roofing Sheet

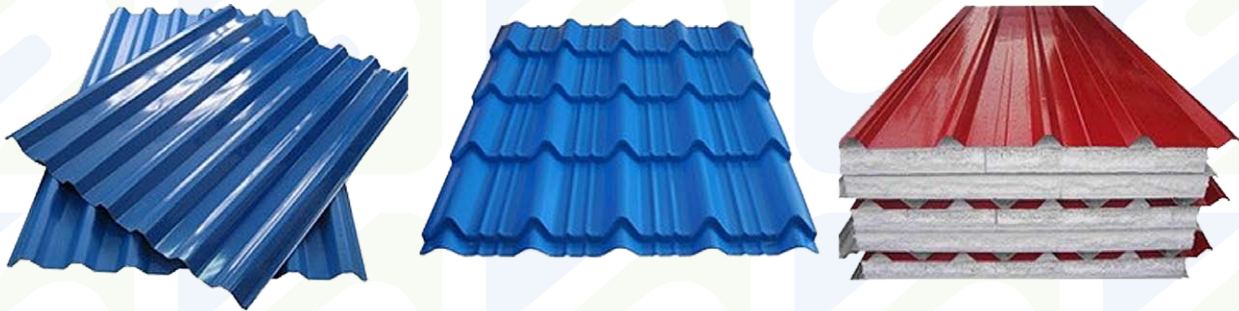

Standard	JIS G3302, JIS G3313, ASTM A653, GB/T2518-88, GB11253-89, BS, ect.
Grade	SGCC, CGCC, SGCD, SPCC, DX51D, DX52D, DX53D
Thickness	0.15mm-1.2mm
Width	750-1000(BC)/665-900mm(AC) or as customer's requirement
Coil Weight	1.5-4tons
Zinc Coating	Z20-Z270g/m ²
Color	sea blue, white grey, bright red or according to RAL color system
Thickness of coating	Top coating: 12-25 microns; back coating: 5-8microns
Technique	Cold rolled/ galvanized steel coil, galvalume steel coil
Surface Production	PE, PVDF, SMP, HDP, ect.
Application	Roofing, Corrugated Roofing Making, Outside of the buildings, Structure, Wall, Deep Drawn, etc.

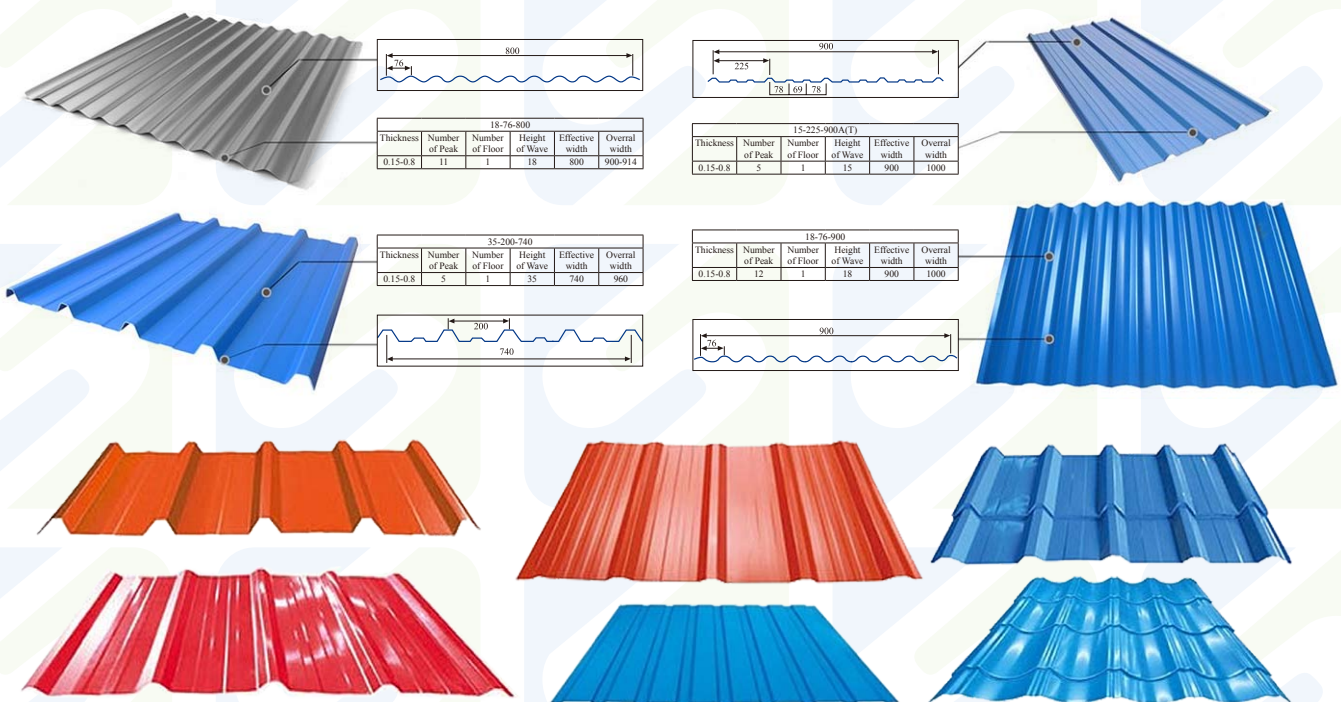

● Annealed Steel Wire

Material: Q195, Q235

Wire Diameter: 0.7mm -4.0mm

Tensile strength: 340-420N/mm²

Weight: 0.1-800kg/coil

Tensile strength: 35-70kg/mm²

Elongation rate: 10%-25%

Usege: Mostly used in construction and daily use as binding wire, tie wire and baling wire, etc.



Galvanized Steel Wire

Material: Q195

Electro galvanized: zinc 15-20grams

Hot-Dipped galvanized: 40grms, 80grams, and 220grams or as customer's requirement

Wire Diameter: 0.71mm-6.58mm

Wire gauge: BWG3--BWG22

Packing: coil with plastic film inside and hessian cloth outside or weaving cloth outside

Galvanized Steel Wire Specification


Low Carbon Steel Wire Gauge Size List (YB/T5294-2009)				
Gauge Size	SWG (mm)	BWG (mm)	AWG (mm)	Metric (mm)
3	6.401	6.58	5.83	-
4	5.893	6.05	5.19	-
5	5.385	5.59	4.62	-
6	4.877	5.16	4.11	-
7	4.470	4.57	3.64	-
8	4.064	4.19	3.26	4.0
9	3.658	3.76	2.91	-
10	3.251	3.40	2.59	3.5
11	2.946	3.05	2.30	-
12	2.642	2.77	2.05	2.8
13	2.337	2.41	1.83	-
14	2.032	2.11	1.63	2.2
15	1.829	1.83	1.45	2.0
16	1.626	1.65	1.29	1.6
17	1.422	1.47	1.15	-
18	1.219	1.24	1.02	1.2
19	1.016	1.07	0.91	-
20	0.914	0.89	0.812	0.9
21	0.813	0.81	0.723	0.8
22	0.711	0.71	0.644	0.7

SWG British Imperial Standard Wire Gage
 BWG Birmingham Wire Gage
 AWG American Wire Gage



● PIPE/TUBE



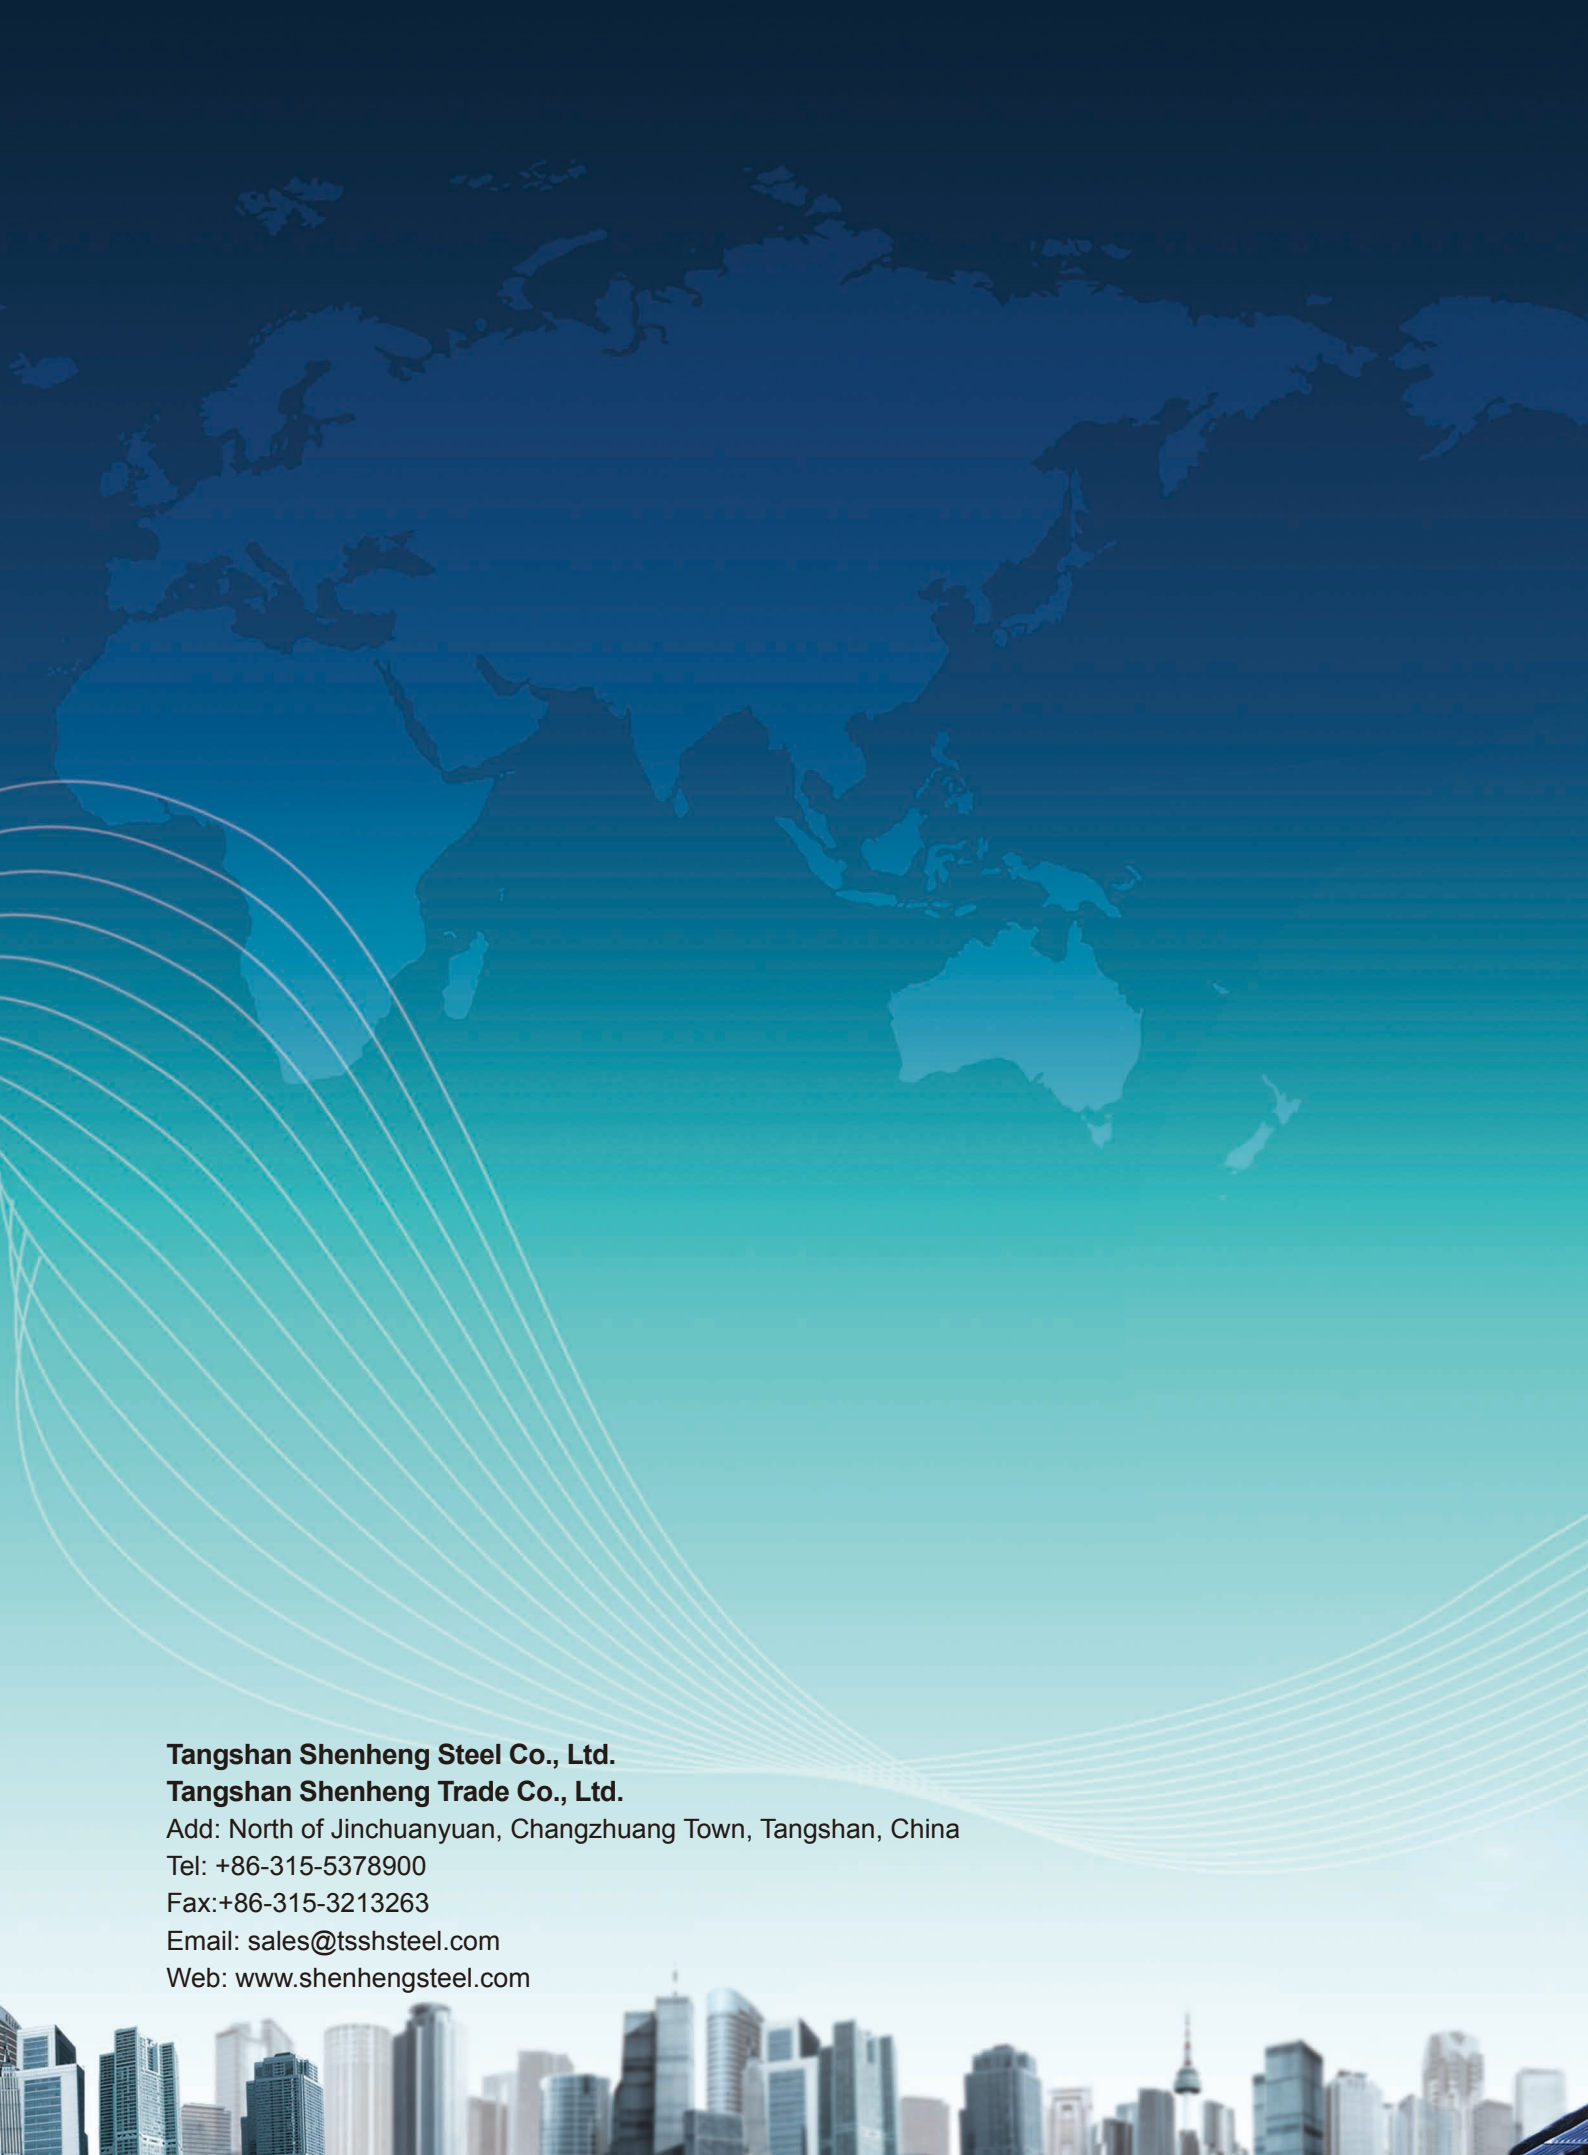

Tangshan Shenheng Steel Co., Ltd.
Tangshan Shenheng Trade Co., Ltd.

Add: North of Jinchuan Yuan, Changzhuang Town, Tangshan, China

Tel: +86-315-5378900

Fax: +86-315-3213263

Email: sales@tsshsteel.com

Web: www.shenhengsteel.com

